

# VIAVI

## 4100B and 4100C Series OTDR Modules

For T-BERD/MTS-2000 V2, –4000 V2, –5800, OneAdvisor, and CellAdvisor 5G platforms

VIAVI Solutions 4100-Series OTDR modules let field technicians rapidly, reliably, and cost-effectively install, turn up, and troubleshoot any optical network architecture: data center interconnection, metro, long-haul and FTTx/access for wireless/5G x-haul, point-to-point or point-to-multipoint passive optical networks (PONs).

Fiber infrastructure is the foundation of the network performance and the quality of delivered services. An OTDR is the only tool that verifies the condition of installed cables and passive components to ensure fiber links meet design specifications and contractor’s workmanship meets the required quality.

Module portability allows migration of fiber test capabilities between different VIAVI platforms, offering the flexibility to move existing fiber certification tools to different technologies such as coax and RF, active xWDM, MPO/ribbon cables or network layer tests such as Ethernet, BERT, CPRI, etc.

### Key Features

- Up to 46 dB dynamic range and 256,000 acquisition points
- PON-optimized for next generation architectures, up to 1x256 split ratio and unbalanced splitters
- Dual/tri-wavelength versions with 1310/1550/1625 or 1650 nm
- Single test port connection for standard and filtered wavelengths – faster, error free testing avoiding customer services disruption
- Consolidated reporting for all wavelengths tested reduces volume of test results to manage by 50%
- Test port condition check to prevent poor launch conditions and inaccurate event detection
- Supports SLM application tailored for various network applications (FTTA, FTTH, Enterprise, High fiber count cables)
- 3-years warranty period



**T-BERD/MTS-2000 V2**  
one-slot handheld modular platform for testing fiber networks



**T-BERD/MTS-4000 V2**  
Two-slot handheld modular platform for testing fiber networks



**T-BERD/MTS-5800**  
Handheld test instrument for testing 10 G Ethernet and fiber networks



**CellAdvisor 5G**  
Cell site test solution



**OneAdvisor-800**  
All-in-One Cell-site Installation and Maintenance Test Solution



Standard feature benefits include:

- Standard multi-pulses acquisition (**SmartAcq**) – improves event detection (splices, connectors, bends, ...) and removes the need for expensive and heavy launch cables.
- Icon-based map view (**Smart Link Mapper** – SLM) – eliminates OTDR interpretation errors and speeds up the results analysis with instant identification of faults and impairments
- The **SmartTEST** mode assists the fiber technicians (new or experienced) throughout the steps of OTDR testing. It is eliminating the complex OTDR tasks (setup configuration, analysis and reporting) and guiding the user through an easy and clear test process.
- For more information, please refer to the OTDR Features brochure.

## Specifications (Typical at 25°C)

<b>General</b>	
Weight	0.35 kg (0.77 lb)
Optical interfaces	
Interchangeable optical connectors	FC, SC and LC
<b>Technical characteristics</b>	
Laser safety class (21CFR)	Class 1
Group index range	1.30000 to 1.70000 in 0.00001 steps
Sampling points	Up to 256,000
Pulse width	From 3ns/5ns to 20µs
<b>Distance measurement</b>	
Modes	Automatic or dual cursor
Display range	0.1 up to 400 km
Cursor resolution	1 cm
Sampling resolution	4 cm
Accuracy <sup>2</sup>	±(0.5 m + sampling resolution +0.001% x distance)
<b>Attenuation measurement</b>	
Modes	Automatic, manual, 2-point, 5-point, and LSA
Display resolution	0.001 dB
Linearity	±0.03 dB/dB
<b>Reflectance/ORL measurement</b>	
Reflectance accuracy	±2 dB
Display resolution	0.01 dB
Threshold	-11 to -99 dB in 1 dB steps
<b>Optical light source (standard)</b>	
Wavelengths	Same as OTDR port <sup>3</sup>
Output power level	-3.5 dBm in CW mode
Tone generation	270Hz, 330Hz, 1 kHz, 2kHz
Auto λ mode	Yes (with VIAVI power meters)
Stability (8h)	<±0.1 dB
<b>Power meter (optional)</b>	
Input power range	-3 to -55 dBm
Calibrated wavelengths	1310/1490/1550/1625/1650 nm
Power level accuracy <sup>4</sup>	±0.5 dB

## OTDR specifications (Typical at 25°C)

	Central wavelengths <sup>5</sup>	RMS dynamic range <sup>6</sup>	Event dead zone <sup>7</sup>	Attenuation dead zone <sup>8</sup>	Splitter attenuation dead zone <sup>9</sup>
4100 B	1310±20 nm 1550±20 nm 1625±10 nm 1650±10 nm	42 dB 40 dB 40 dB 40 dB	0.65 m	2.5 m	45 m <sup>9</sup>
4100 C	1310±20 nm 1550±20 nm 1625±10 nm 1650±10 nm	46 dB 45 dB 45 dB 43 dB	0.65 m	2.5 m	20 m <sup>10</sup>

<sup>1</sup> With 4100 C OTDR modules and EPULSE3NS software

<sup>2</sup>Excluding group index uncertainties

<sup>3</sup>Except filtered wavelengths

<sup>4</sup>At calibrated wavelengths, at -30dBm excluding connection uncertainty

<sup>5</sup>Laser at 25°C and measured at 10µs

<sup>6</sup>The one-way difference between the extrapolated backscattering level at the start of the fiber and the RMS noise level, after 3 minutes averaging

<sup>7</sup>Measured at ±1.5 dB down from the peak of an unsaturated reflective event, using 5ns pulsewidth

<sup>8</sup>Measured at ±0.5 dB down from the linear regression using a FC/UPC-type reflectance, using 5ns pulsewidth at 1310nm

<sup>9</sup>Measured on a 16 dB loss (typical 1x32 split ratio) non-reflective splitter at 1310nm, using 200ns pulsewidth


<sup>10</sup>Measured on a 16 dB loss (typical 1x32 split ratio) non-reflective splitter at 1310nm, using 100ns pulsewidth

## Ordering Information

Description	Part number
4100 MODULE B OTDR - 1310/1550 NM – PC/APC	E4126B-PC/-APC
4100 MODULE B OTDR - 1310/1550/1625 NM – PC/APC	E4136B-PC/-APC
4100 MODULE B OTDR - 1310/1550/Filtered 1650 NM – APC	E4138FB65-APC
4100 MODULE B OTDR - Filtered 1650 NM – APC	E4118FB65-APC
4100 MODULE C OTDR - 1310/1550 NM – PC/APC	E4126C-PC/-APC
4100 MODULE C OTDR - 1310/1550/1625 NM – PC/APC	E4136C-PC/-APC
4100 MODULE C OTDR - 1310/1550/Filtered 1625 NM – APC	E4136FC-APC
4100 MODULE C OTDR - 1310/1550/Filtered 1650 NM – APC	E4138FC65-APC
Universal PC connector adapters	EUSCADS, EULCADS, EUFCADS
Universal APC connector adapters	EUSCADS-APC, EULCADS-APC, EUFCADS
Optical power meter option	E41OTDRPM


## Test Process Automation (TPA)

Allows your team to deliver expert-level test results and close projects on the first try, every time. TPA is a closed loop test system that optimizes workflows, eliminates manual, error prone work and automates immediate data reporting for job close out, team progress updates and network health analytics. Execute jobs efficiently to ensure high quality network builds, rapid turn-up/activation and enhanced operational visibility.

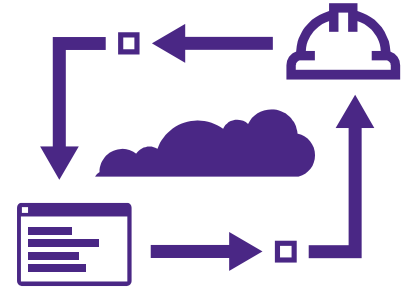

## Inspect Before You Connect (IBYC)

Contamination is the number 1 reason for troubleshooting optical networks. Proactive inspection and cleaning of fiber connectors can prevent poor signal performance, equipment damage, and network downtime.

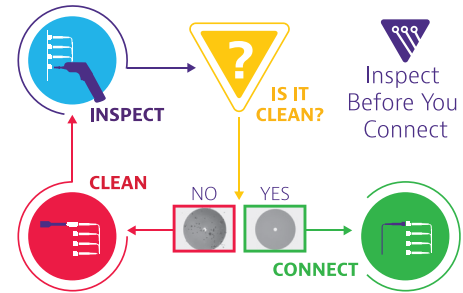

## VIAMI Care Support Plans

Increase your productivity for up to 5 years with optional VIAMI Care Support Plans:

- Maximize your time with on-demand training, priority technical application support and rapid service.
- Maintain your equipment for peak performance at a low, predictable cost.

Plan availability depends on product and region. Not all plans are available for each product or in every region. To find out which VIAMI Care Support Plan options are available for this product in your region, contact your local representative or visit: [viavisolutions.com/viamicareplan](https://viavisolutions.com/viamicareplan)

## Features

\*5-year plans only

Plan	Objective	Technical Assistance	Factory Repair	Priority Service	Self-paced Training	5 Year Battery and Bag Coverage	Factory Calibration	Accessory Coverage	Express Loaner
 <b>BronzeCare</b>	Technician Efficiency	Premium	✓	✓	✓				
 <b>SilverCare</b>	Maintenance & Measurement Accuracy	Premium	✓	✓	✓	✓*	✓		
 <b>MaxCare</b>	High Availability	Premium	✓	✓	✓	✓*	✓	✓	✓



Contact Us **+1 844 GO VIAMI**  
(+1 844 468 4284)

To reach the VIAMI office nearest you,  
visit [viavisolutions.com/contact](https://viavisolutions.com/contact)

© 2021 VIAMI Solutions Inc.  
Product specifications and descriptions in this document are subject to change without notice. Patented as described at [viavisolutions.com/patents](https://viavisolutions.com/patents)  
4100bc-otdrmodule-ds-fop-nse-ae  
30192912 904 1021

[viavisolutions.com](https://viavisolutions.com)