


材质:128g铜版纸
尺寸: 90x124mm

H23139英文说明书AH2 V2.0: 0106010022396

User manual

HDMI EXTENDER

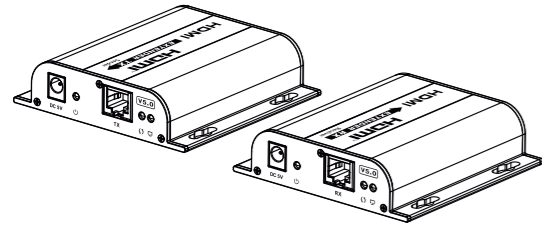

The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI Trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

Important Safety instructions:

1. Do not mix up the HDMI EXTENDER sender and HDMI EXTENDER receiver, and the IR blaster and IR receiver.
2. Do not plug-in/out the cables ,when it is in using.
3. Use DC 5V power supply only. Make sure the specification matched if using 3rd party DC adapters.
4. Support and compliant with IEEE802.3af international standard POE switch. The maximum wattage of the transmitter or receiver is 10W.

• Introduction


This product is a 1080P HDMI extender kit consisting of a Sender and a receiver. The 1080P HDMI signal can be extended up to 120m via Category 6 and above network cables, supporting one-to-one connection, one-to-many connections via gigabit switch, or switch cascades. It also supports IR passback functions, and can be widely used in meetings, home entertainment, educational presentations, and other fields.

• Features

1. High-definition and low-latency transmission.
2. Support up to 1920x1200@60Hz resolution, backward compatible.
3. Compatible with Cat5/5e/6 or above network cables, transmission distance of Cat6 cable is 120 meters.
4. Support one-to-one or one-to-many connections through the gigabit switch.
5. Support IR passback (20~60kHz).
6. Firmware can be upgraded through Micro USB.
7. Lightning protection, surge protection, ESD protection.
8. Supports stable 24/7 operation.

2

• Package Contents

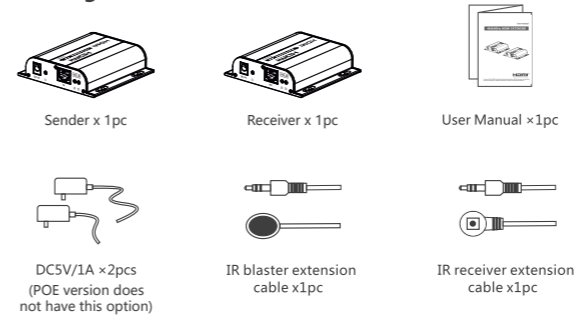

Note : above accessory content is regular package for a kit. If buy HDMI extender TX or HDMI extender RX separately, the package contents would be different.


• Installation Requirements

1. HDMI source device(computer graphics card, DVD,PS3, HD monitoring equipment etc).
2. HDMI display device like SDTV, HDTV, projector with HDMI port.
3. Network cables : UTP/STP Cat5e/6 network cables, which following the standard of IEEE-568B.
Transmission length: CAT5 80m/CAT5E 100m/CAT6 120m.

3


• Panel Description

1. HDMI EXTENDER TX (Sender)



- | | |
|--|---|
| ① Reset | ⑦ RJ45 signal output |
| ② Firmware upgrading | ⑧ Data transmission light |
| ③ HDMI signal input | Light off: No data transmission |
| ④ IR signal output to connect with blaster extension cable | Steady on: The data is transmitting |
| ⑤ Power input(DC 5V/1A) | ⑨ Network link light |
| ⑥ Power Light | Light off: No Network connection |
| The indicator will turn on when the power is turned on | Steady on: Network connection is normal |

2. HDMI EXTENDER RX(Receiver)



- | | |
|---|---|
| ① Reset | ⑦ RJ45 signal input |
| ② Firmware upgrading | ⑧ Data transmission light |
| ③ HDMI signal output | Light off: No data transmission |
| ④ IR signal input to connect with IR receiver extension cable | Steady on: The data is transmitting |
| ⑤ Power input(DC 5V/1A) | ⑨ Network link light |
| ⑥ Power Light | Light off: No Network connection |
| The indicator will turn on when the power is turned on | Steady on: Network connection is normal |

4

• Installation Procedures

1. How to make a Cat5e/6 network cable


Follow the standard of IEEE-568B:

- | | | |
|----------------|--------------|---------------|
| 1-Orange/white | 4-Blue | 7-Brown/white |
| 2-Orange | 5-Blue/white | 8-Brown |
| 3-Green/white | 6-Green | |




2. Connections

2.1 Point to Point connection: Up to 120 meters transmission distance over single CAT6.

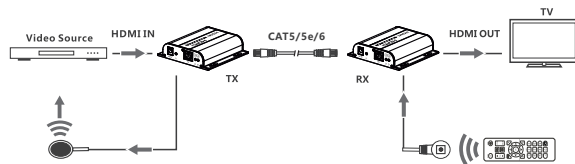


2.2 LAN Switch Cascade Connection: By using the LAN switch/router to realize unlimited extension.

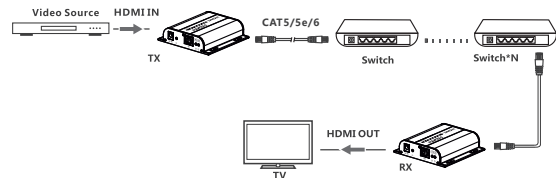

2.3 One-to-many Connection: By using network router/switch, one sender to several receivers, realize extender & splitter function.

5

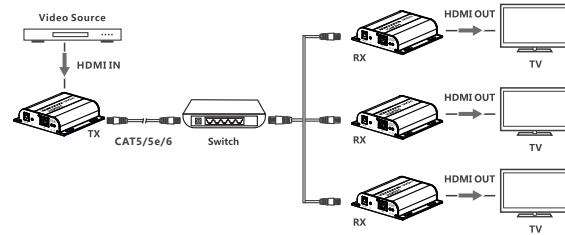

Note:

1. If it is POE version, please use POE network router/switch.
2. It is recommended that Gigabit Ethernet switches (1000Mbps) be used in LAN.

3. IR User Guide

- 1) IR blaster extension cable should plug in the IR OUT port of the sender, IR receiver extension cable should plug in the IR IN port of the receiver.
- 2) The emitter of the IR blaster extension cable should be as close as possible to the IR receiving window of the source device.
- 3) Point the remote control at the receiving head of the IR receiver extension cable to operate.

• FAQ

Q : TV display "Waiting for connection..." ?

A : Please check if the power supply of TX (Sender) and switches (if used) is connected, and make sure connecting cable is firmly.

Q : TV display "Please check the TX input signal" ?

- A :**
- 1) please check if there is a HDMI signal input of TX.
 - 2) Try to connect the signal source directly to display device to see if there is signal output from source device or change the signal source, HDMI wire and try again.

Q : Display not fluent, not stable?

- A :**
- 1) Please check the cable length between the TX to switch, the switch to the RX and the connection between each level is within the required range.
 - 2) Click the "reset" button on the TX/RX front panel, reset and reconnect.

6

• Specification

Item	Sender	Receiver
Video		
Input interface	1x HDMI	1x RJ45
Output interface	1x RJ45	1x HDMI
HDMI length	≤ 5m	≤ 5m
Maximum transfer rate	4.96Gbps	
Compatibility	HDMI 1.3 HDCP 1.4	
Resolutions	1080P@24/25/30/50/60Hz, 720P@50/60Hz, 576P@60Hz, 480P@60Hz, 1920x1200, 1680x1050, 1600x900, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600	
Connection types	One-to-one connection One-to-many connection Switch cascading	
Transmission distance	CAT5 80m / CAT5E 100m / CAT6 120m	
Transmission latency	80~130ms	
Audio signal		
Input interface	1×HDMI	1×RJ45
Output interface	1×RJ45	1×HDMI
HDMI output	LPCM 2.0	
Command Signal		
IR interface	1x 3.5mm IR OUT	1x 3.5mm IR IN
IR receiving range	≤ 5m	
IR frequency	20kHz~60kHz	
Power		
Power Supply	DC 5V/1A	DC 5V/1A

7

Power Consumption	TX ≤ 3.5W	RX ≤ 2.5W
Operating Environment		
Working temperature	- 20°C~60°C	
Storage temperature	- 30°C~70°C	
Humidity	0~90%RH (no condensation)	
Physical Properties		
Housing	Aluminium	
Weight	150g	145g
Color	Black	
Dimensions	96.8(L)*94(W)*23.7(H)mm	
Protection	ESD protection 1a Contact discharge level 2 (±4KV) 1b Air discharge level 3 (±8KV) Implementation of the standard: IEC61000-4-2 Lightning protection, Surge protection	

Disclaimer

The product name and brand name may be registered trademark of related manufactures. ™ and ® may be omitted on the user manual. The pictures in his user manual are just for reference. We reserve the rights to make changes without further notice to a product or system described herein to improve reliability, function or design.

8